Twister 1200

ultra-fast and reliable!



Highlights:


- 32byte send and 32byte receive buffer
- EOF-Mode (saves internal overhead inside of well done programms like MiamiTCP/IP)
- driver enables real FIFO-based automatic Flow-Control, hardware handshake included (no longer overruns because of a bad concept)
- high throughput of 33000 characters per second at quite low load to CPU
- unique bitrates of 460800 BPS garanteed and 691200 BPS typical
- usable with all variants of Melody 1200 and for sure even without it
- ships with accessories for mounting it into A1200-Tower (bracket)
- flexible because of adapter cable
 9pol-SubD-> 25pol-SubD (included)

Infos:

Twister 1200 is a very fast serial interface done for Amiga1200. Like all our new modules Twister can even be used with Zorro1200 and therefore is even usefull for Amigas with Zorro bus.

Additionally Twister 1200 may be used on top of a Melody 1200 iside of an Amiga 1200. Mechanical requirements (connector) make it recommended to use a tower housing.

Up to our knowledge Twister 1200 still is the only expansion for Amiga that offers **working** Hardware-Flow-Control to prevent buffer overruns and (known from the original interface inside Amiga).

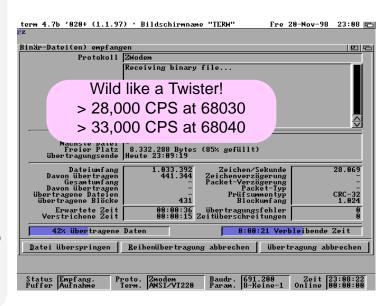

Rüdiger Gruner Bürotechnik http://www.katodev.de/sales

E-Mail:sales@katodev.de
Tel :+49 (0)40 72910478
Fax :+49 (0)40 71098761

http://www.katodev.de

A T O

Development Group

DCE Computer Service GmbH

http://www.dcecom.de E-mail:sales@dcecom.de Tel : +49 (0)208 660673 Fax : +49 (0)208 630496